



Performance by ExconMobil

How to use this refrigeration lubricant selector

Obtain/confirm the following information:

- a. REFRIGERANT FLUID in use (ASHRAE designation)
- **b.** Evaporator is of dry type (oil carryover less than 15%) and EVAPORATOR TEMPERATURE in °C
- c. COMPRESSOR TYPE and outlet temperature
- To identify the suitable Mobil™-branded lubricant(s) refer to the row that corresponds to the refrigerant fluid and the evaporator temperature.
- If mineral and synthetic lubricants are both indicated, synthetic lubricants will in general offer a higher level of performance than mineral oils with respect to equipment protection, particularly at high and low operating temperatures, compressor efficiency, and oil life.
- For information on builder approvals for Mobil-branded refrigeration lubricants, please refer to Table 2 on the back page.
- For further clarification, please contact your local ExxonMobil lubricants representative or the Technical Help Desk.

- a. For equipment under warranty, please refer to equipment builder recommendations.
- **b.** In changing refrigeration oil technology or brands, ensure thorough flushing of the system to minimize contamination with the previous technology or brand.




mobilindustrial.com

© 2015 Exxon Mobil Corporation. All rights reserved. All trademarks used herein are trademarks or registered trademarks of Exxon Mobil Corporation or one of its affiliates unless otherwise noted.

Health and Safety

Based on available information, these products are not expected to produce adverse effects on health when used for the applications referred to above and the recommendations provided in the Material Safety Data Sheets (MSDSs) are followed. MSDSs are available upon request through your sales contact office or via the Internet. These products should not be used for purposes other than the applications referred to above. If disposing of used product, take care to protect the environment.

MobilTM-branded Refrigeration Lubricant Selection Guide for Industrial Systems

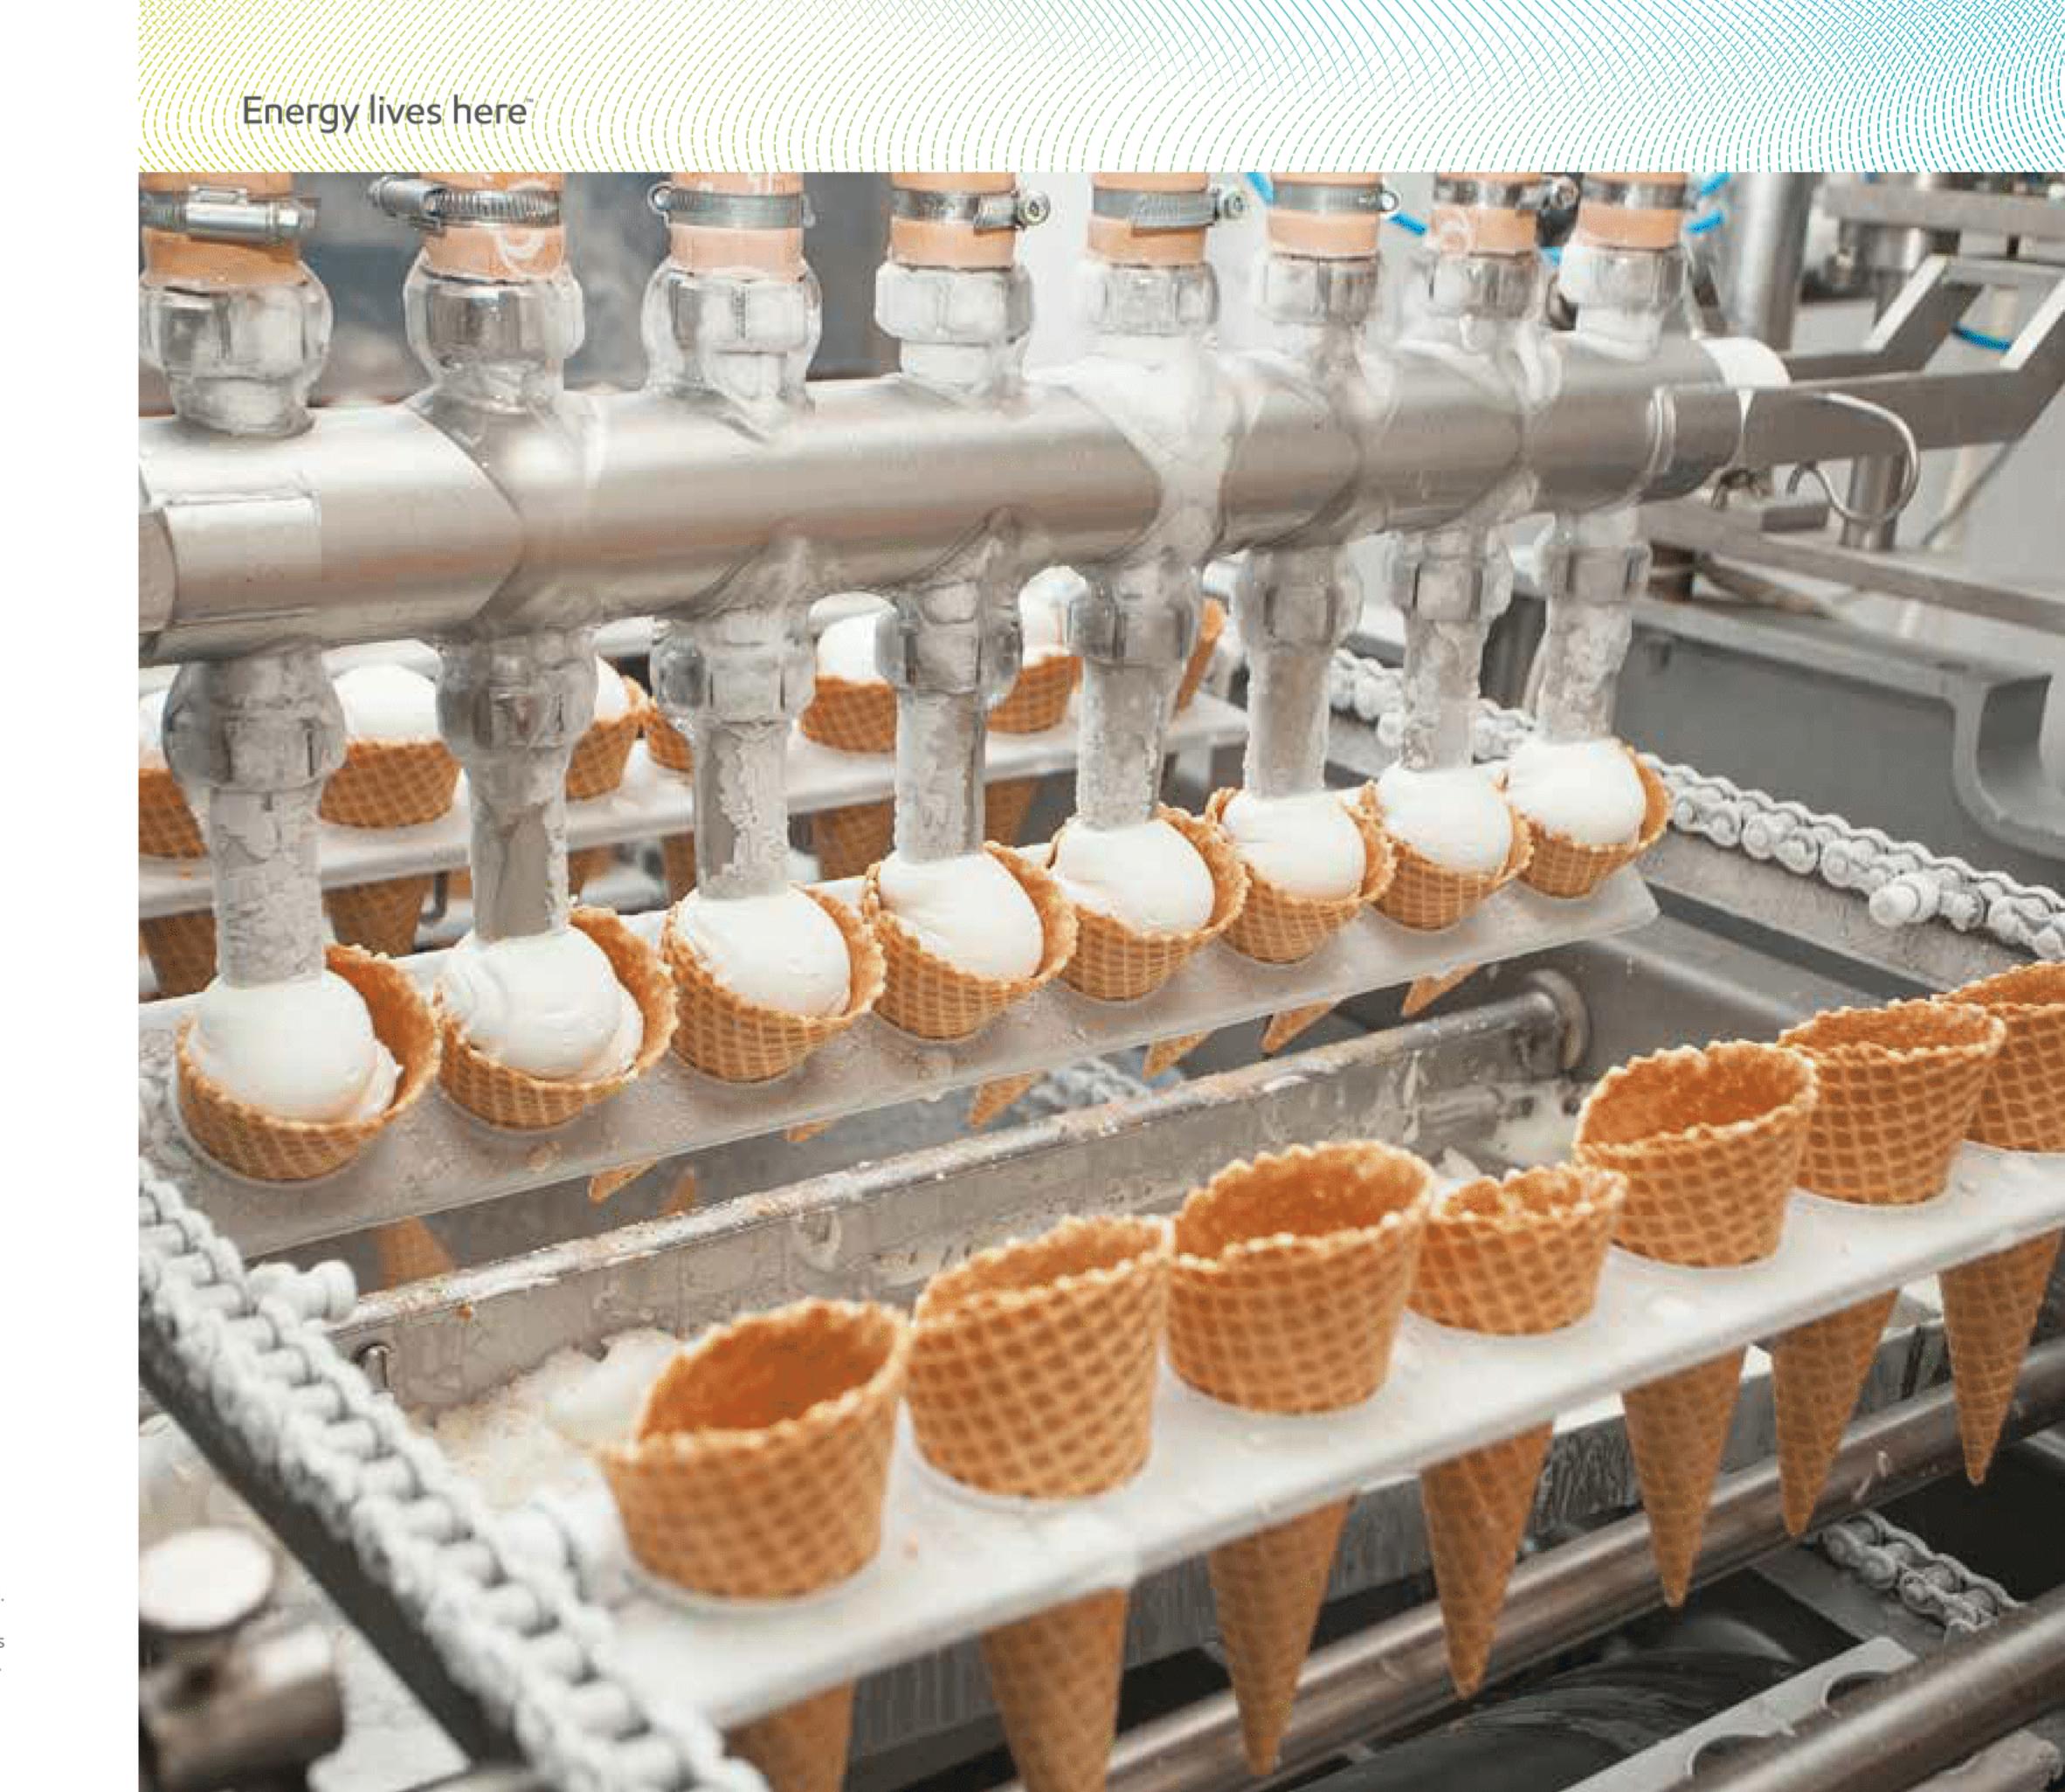

Mobil-branded Refrigeration Lubricant Selection Guide for Industrial Systems

High performance Mobil industrial lubricants for refrigeration applications are listed below, each one formulated to offer outstanding equipment protection and extended oil life. These charts are designed to help you determine which lubricant is most suitable for your system, based on the type of refrigerant fluid, evaporator temperature and compressor type. Please visit mobilindustrial.com for more information.

400 cSt at 40°C

Mobil Gargoyle Arctic SHC[™] 200 Series

Supreme performance synthetic lubricants for refrigeration compressors and

Superb low temperature capability provides excellent fluidity at low temperatures. Resistance to viscosity loss due to refrigerant absorption under

pressure for excellent bearing-film thickness and shaft-sealing properties. * Mobil Gargoyle Arctic SHC™ 226 E PAO (Polyalphaolefin) 3 Mobil Gargoyle Arctic SHC[™] 228 4 Mobil Gargoyle Arctic SHC™ 230

Mobil Gargoyle Arctic SHC™ NH 68

5 Mobil Gargoyle Arctic SHC™ 234

Supreme performance synthetic lubricant for refrigeration compressors with ammonia refrigerant

Features and Benefits

Wax-free for excellent low temperature fluidity and evaporator efficiency. Outstanding thermal/oxidative and chemical stability for long oil life and extended drain intervals. Compatibility with seals previously used with mineral lubricant for limited risk of oil leakage.

Lubricant 6 ** Mobil Gargoyle Arctic SHC™NH 68 PAO/AB (Alkylbenzene) 68

Mobil Gargoyle™ Arctic 155 & 300

High performance naphthenic mineral oils for refrigeration compressors Features and Benefits

Low pour point and good fluidity at very low temperatures. Good chemical stability. Suitable for both cylinder and bearing lubrication.

N°	Lubricant	Technology	ISO VG
7	Mobil Gargoyle™ Arctic Oil 155	MN (Mineral Naphthenic)	32
8	Mobil Gargoyle™ Arctic Oil 300	MN (Mineral Naphthenic)	68

Mobil EAL Arctic™ Series

High performance Polyol Ester (POE) for refrigeration compressors and

Features and Benefits

Specifically designed for use with ozone-friendly HFC refrigerant fluids. Formulated from synthesized Polyol Esters to provide outstanding lubricity and wear protection, as well as chemical and thermal stability

and wear protection, as well as chemical and thermal stability.								
N°	Lubricant	Technology	ISO V					
9	Mobil EAL Arctic [™] 22 or 22CC***	POE (Polyol Ester)	22					
10	Mobil EAL Arctic™ 32	POE (Polyol Ester)	32					
11	Mobil EAL Arctic [™] 46	POE (Polyol Ester)	46					
12	Mobil EAL Arctic [™] 68	POE (Polyol Ester)	68					
13	Mobil EAL Arctic™ 100	POE (Polyol Ester)	100					
14	Mobil EAL Arctic [™] 220	POE (Polyol Ester)	220					

Mobil Glygoyle™ 22

Synthetic Polyalkylene Glycol-based (PAG) lubricant suitable for specific refrigeration applications

Features and Benefits

Shear-stable with outstanding resistance to thermal degradation and the formation of sludge and deposits. Suitable for HC (hydrocarbon) or CO₂ refrigerant fluid applications.

N°	Lubricant	Technology	ISO VG
15	Mobil Glygoyle™ 22	PG (Polyglycol)	150

Mobil Zerice[™] S Series

Premium synthetic refrigeration compressor lubricants for ultralow temperature applications

Features and Benefits

Outstanding solubility with halocarbon refrigerants, helping avoid oil separation and congealing on the valve and heat-transfer surfaces of the refrigeration system. Very low pour and floc points prevent harmful wax precipitation blocking expansion valves.

precipitation blocking expansion valves.							
	N°	Lubricant	Technology	ISO			
	16	Mobil Zerice™ S 32	AB (Alkylbenzene)	32			
	17	Mobil Zerice™ S 68	AB (Alkylbenzene)	68			
	18	Mobil Zerice™ S 100	AB (Alkylbenzene)	100			

Mobil SHC Gargoyle™ 80 POE

New generation synthesized Polyol Ester (POE) of moderate solubility with HFCs and CO₂ refrigerants

Features and Benefits

Specifically designed for use with CO₂ and ozone-friendly HFC refrigerant fluids when moderate solubility is required to keep proper viscosity at application. Provides outstanding lubricity and wear protection, as well as chemical and thermal stability.

N°	Lubricant	Technology	ISO VG
19	Mobil SHC Gargoyle™ 80 POE	POE	80 cSt at 40°

Mobil Gargoyle™ Arctic 68 NH

New generation Mineral Paraffinic

Higher performance mineral lubricant for refrigeration compressors with ammonia refrigerant

Features and Benefits

Specifically designed for ammonia application, excellent low temperature performance and oxidation stability. Good lubricity and wear protection.

		,	,	'	
N°	Lubricant		Technology		ISO VG
20	Mobil Gargoyle™ Arctic 68 NH		Mineral Paraffinic		68

TABLE 1: REFRIGERATION LUBRICANT SELECTOR

TABLE 1. KEI KIGEKATION EGBRICANT SELECTOR											
Refrigerant fluid			•	orator erature	Compressor type						
ASHRAE Name	Туре	Transition or Substitute of	From (°C)	To (°C)	Piston	Piston Screv		Centrifuga	1		
R22	HCFC		-25	+10	16	2 18		8			
R22	HCFC		-50	+10	16	18		8			
R123	HCFC	R11	0	+20				8			
R124	HCFC	R114	0	+80	8	18					
R401A	HCFC	R12	-20	+10	7 16						
R402A	HCFC	R502	-50	-30	16						
R408A	HCFC	R502	-50	-30	16	18					
R409A	HCFC	R12	-20	+10	7 16						
R290	C3H8(propane)		-30	+20	8	15		15			
R600/600a	Butane, Iso Butane		-30	+20	8	15		15			
R1270	Propene(=propylene)		-40	+10	2	4		3			
R717	NH3 (ammonia)		-40	+10	20 2*	6** 20 2 *	6**	20			
R717	NH3 (ammonia)		-50	+10	2*	6** 2*	6**	20			
R744(1)	CO2	Non miscible	-55	-10		2					
R744(1)	CO2	Miscible	-55	-10	19						
R23	HFC		-100	-40	9						
R134a	HFC	R12	-20	+10	10	14		12			
R134a	HFC	R12	-30	+10	9	13		12			
R404A	HFC	R502	-40	-30	10	14		12			
R404A	HFC	R502	-50	-30	9	13		12			
R407C	HFC	R22	0	+10	12	14					
R407F	HFC	R22	-40	0	9	13		12			
R410A	HFC		-45	+10	9	13		12			
R410A	HFC		-25	+10	10	14		12			
R410B	HFC		-25	+10	10	14		12			
R417A (Isceon M059)	HFC	R22	-15	+15	12	14		12			
R422A (Isceon M079)	HFC	R22	-45	-5	9	13		12			
R422A (Isceon M079)	HFC	R22	-25	-5	10	14		12			
R422D (Isceon M029)	HFC	R22	-45	+10	9	13		12			
R422D (Isceon M029)	HFC	R22	-25	+10	10	14		12			
R427A(FX100)	HFC	R22	-40	+10	9	13		12			
R427A(FX100)	HFC	R22	-20	+10	11	14		12			
R507/507A	HFC		-40	0	9	13		12			
R507/507A	HFC		-20	0	11	14		12			
R1234ze (E)	HFO	R134a	-20	+10	13	14		13			

TABLE 2: Builder Approvals for Mobil-branded Refrigeration Oils

Mobil-branded refrigeration lubricant product recommendations, according to equipment builder approvals and refrigerant type.

Builder	Country	Builder-approved refrigeration oil technology (colour) and mobil-branded refrigeration oil(s) (text)													
			HCFC			NH ₃			HC (CO ₂			
Johnson Controls (Sabroe)	Denmark	18	18 3		12,13,14	6	6	2,3,4				Misc		lisc	
Bitzer	Germany	8(P)		17(P)	9***,10,12(P)	8(P)		1,2(S)				Miso	c	Ν	Misc
GEA Grasso	Netherlands	8(S,P)	16(S) 17(S,P)	6(S)	12(S,P) 13(S)	8(S)	16(S)	2(S)	6	1	5	Misc	N Mi	isc	N Misc
Carrier	France	7(P) 8(P)	16(P)		12(P)										
Frascold	Italy			10,12(P)											
Dorin	Italy				10,11						Mise		Ν	Misc	
Emerson Copeland USA		(S) (S)		9***							Misc				
Carrier	USA				9***(Scr),12										
Wuhan McQuay	China				11,12										

TABLE 3: Builders with Specific Lubricant Technology Requirements

Mobil-branded refrigeration lubricant product technology recommendations, according to equipment builder. When under warranty, please refer to equipment manual.

Builder	Country	Builder-approved refrigeration oil technology (colour)									
		HCF	С	HFC	N	H ₃	НС		O ₂		
Johnson Controls (York)	Denmark							N	1isc		
Johnson Controls (Frick)	Denmark							N Misc	N Misc		
Danfoss	Denmark										
Howden	UK							N	Misc		
Bristol	USA										
Mycom	USA							Misc	N Misc		
Vilter	USA							N	Misc		
Daikin	Japan							Ν	Misc		
MHI	Japan										
Kobe Steel	Japan										
Chongqing General Industry Co	China										

N Misc = Non Miscible Application Misc = Miscible Application P = Piston compressor S = Screw compressor Scr = Scroll

* For new units ** For existing units *** For Emerson Copeland pistons compressors or where indicated ***, use only 22CC

This guide is for refrigeration lubricant selection for industrial systems with dry type evaporators (i.e., oil carryover into evaporator is less than 15%). To select a lubricant for other types of refrigeration systems, please contact the Technical Help Desk on TechDeskEurope@exxonmobil.com or visit mobilindustrial.com